

Porch Rail Jig-o-matic

HfH
East Bay

1/15/08

JRLee




2 x 6 top rail. Attached to Baluster Shoe with several 1.5" galvanized screws into bottom.

2x bottom rail. One 3½" deck screw into baluster (prevents pull out).



1x2 Baluster Shoe. Two Nails through top into baluster (prevent rotation)

2x2 square baluster

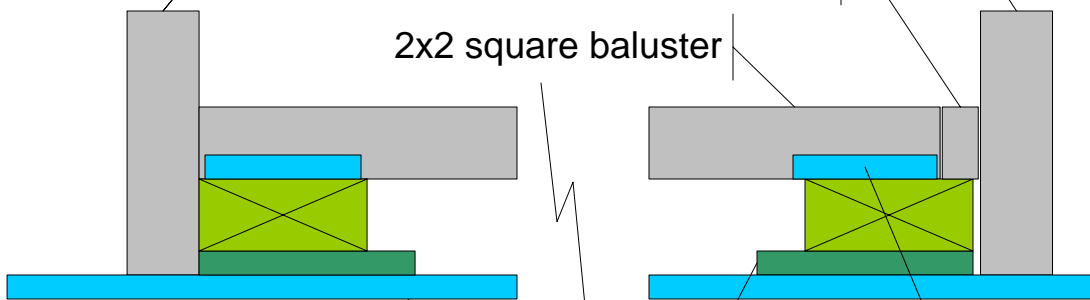

Bottom work surface.
4x8x½ OSB

½" OSB Baluster
spacers. 3"x3"

Spacer as req'd to lift
baluster to mid points of rail